

DO NOT INSTALL THIS FIXTURE AGAINST A WALL UNLESS THE APPROPRIATE FLANGE IS FIRST INSTALLED



THIS PRODUCT MUST BE INSTALLED BY A QUALIFIED PLUMBER. MAINTAIN THE SURFACE OF THE BASE PROTECTED AT ALL TIMES DURING THE INSTALLATION. THIS PACKAGING BOX CONTAINS FOAM FILM YOU CAN USE TO PROTECT THE BASE DURING THE INSTALLATION ALONG WITH THE BOX LID. PLACE THE FOAM FILM ON THE SURFACE OF THE BASE AND THEN THE BOX LID ON THE FOAM FILM BEFORE INSTALLING. ENSURE TO REMOVE ANY STAPLE FROM THE BOX LID BEFORE USE. ALSO, WATCH FOR SCREWS, STAPLES, DIRT OR OTHER DEBRIS THAT CAN FALL ON TO THE BASE AND WILL POSSIBLY CAUSE SCRATCHES IF STEPPED ON.

Shower Bases Installation Instructions

Before you begin

MATERIALS AND TOOLS



Protective gloves




Safety Glasses



Screwdriver

Included



Tile Flange



Tape Measure



Spirit level



For porcelain stoneware tiles



Notched Trowel

Included



Polyurethane glue

Included



Drain



2 People Required

IMPORTANT - STORE BASE ON FLAT

Recommended for installation on concrete floors

PRIOR TO INSTALLATION

READ ENTIRELY THE INSTRUCTIONS BEFORE BEGINNING THE INSTALLATION

Prior to installation, the shower base must be checked thoroughly for defects. In the unlikely event that the product has a defect, it must not be installed.

The manufacturer will not be held responsible for the costs of removal or replacement of a shower base or any other costs incurred as a result of the shower base having a defect if said defect was identifiable prior to installation.

INSTALLATION OF THE SHOWER BASE WILL BE TREATED AS ACCEPTANCE OF QUALITY.

Place the shower base on a flat level surface.

Using a spirit level, ensure that all outer edges of the shower base are flat and level as per figure 1.

If any of the levels cannot be corrected when embedding the shower base, then it may be twisted or distorted. If this is the case, then the shower base must not be installed and should be returned to the retailer for replacement.

Flush with the floor/above floor installation options

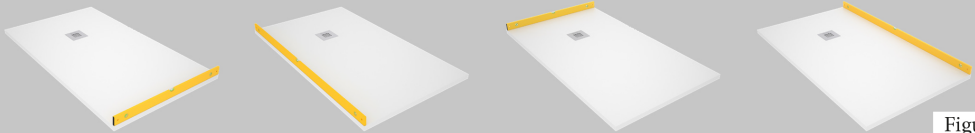


Figure 1

INSTALLATION

This product must be installed by a qualified plumber. It is the installer's responsibility to ensure a proper installation, a trouble-free water evacuation and a total watertightness.

Note that this shower base is suitable for installation on both concrete and wooden floors (never on sand only). If fitting to a wooden floor, it is recommended that the ground be made from wood resisting delamination under humid conditions.

Recommended installation:

1- Before installing the shower base:

1.1 Install the tile flange to the base and seal the corners with polyurethane glue as per Figure 2.

1.2 Then install the shower drain to the shower base. Drain can not arise from the surface otherwise it will not flow properly.

Do not install this fixture against a wall unless the appropriate flange is first installed.

2- For the perfect installation of the shower base, it is necessary to create a completely level surface, smooth and dry.

a) For concrete floors: Pour flexible cement glue for porcelain stoneware tiles on the concrete floor. Spread evenly with a notched trowel as per figure 3 a.

b) For wooden floors:

Apply polyurethane glue on the wooden floor as per figure 3 b.




Figure 3a




Figure 3b

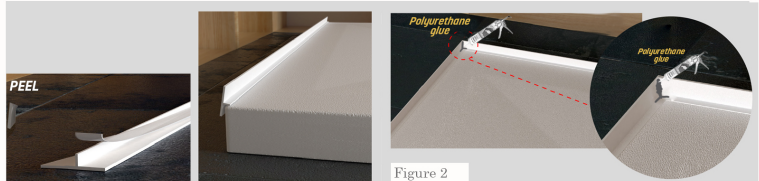


Figure 2

DO NOT STAIN THE SHOWER BASE WHEN APPLYING POLYURETHANE GLUE

3. Spread polyurethane glue on the underside of the shower base due to be in contact with the floor area as per figure 4.

4. Settle the shower base into final position and tap level as per figure 5.

5. Allow the adhesive to set before applying any further weight to the shower base.

6. Now that the shower base is in final position, place the drain cover grid on the base.

7. Before proceeding any further, the shower base must be checked for proper drainage with good water volume poured on to all shower base areas. If the shower base fails to drain water suitably, then double check that it is level. If the base is level and still fails to drain water, then there may be a blockage in the drainage pipe.

In the unlikely event that the base is faulty, the installation must be halted and the shower base returned to the supplier for replacement.

Tiles / paneling / shower doors / screens or any other fixtures relating to the shower area must not be fitted if the shower base has a fault.

The shower base may not properly drain with integral siphon drains if a second siphon is installed.

8. It is the installer's responsibility to ensure a total watertightness. It is recommended to seal the joints and the shower drain for that purpose. Plumber's putty is not recommended.

Do not use the shower base within the first 24 hours after installation.

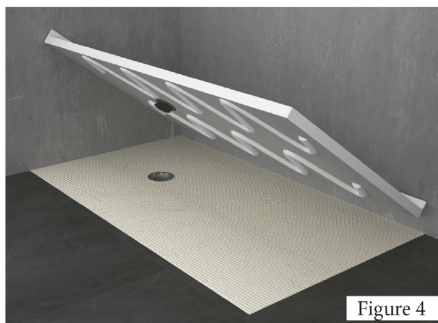


Figure 4


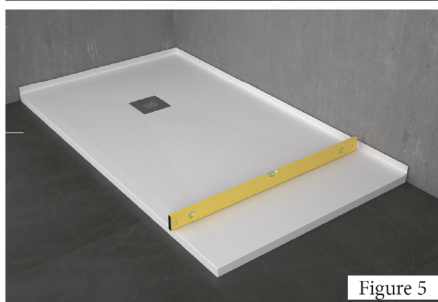


Figure 5



24 h

CHECK THAT THE SHOWER BASE DRAINS PROPERLY.

IF IN DOUBT, CONTACT YOUR SUPPLIER



FINAL RESULT

MAINTENANCE



Clean regularly with a PH Neutral detergent, rinse abundantly with water until there is no residue of detergent and dry.



To remove any residue, simply wipe with a soft clean cloth and PH neutral detergent. Rinse with abundant water.



Avoid the use of scouring sponges as well as alcohol, solvents, acid or abrasive products